


ISOLATED CONVERTER



- Isolation and conversion of standard DC signals
- Slimline housing of 6 mm
- Response time <7 ms
- Low cost
- DIP-switch configured

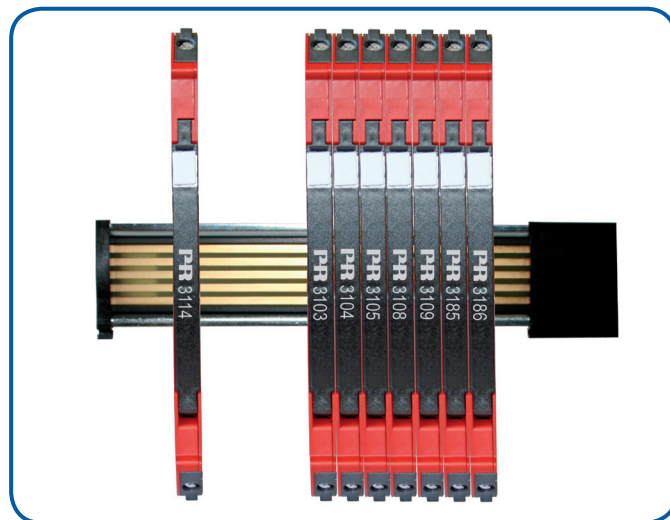


Applications

- Isolation and conversion of standard DC signals.
- Galvanic separation of analogue current and voltage signals.
- Elimination of ground loops and measurement of floating signals.
- A competitive choice in terms of both price and technology for galvanic isolation of current and voltage signals to SCADA systems or PLC equipment.
- Suitable for environments with high vibration stress, e.g. ships.

Technical characteristics

- Easy configuration via DIP-switches.
- The input is protected against overvoltage and polarity error.
- Factory-calibrated measurement ranges.
- Inputs and outputs are floating and galvanically separated.

Connections

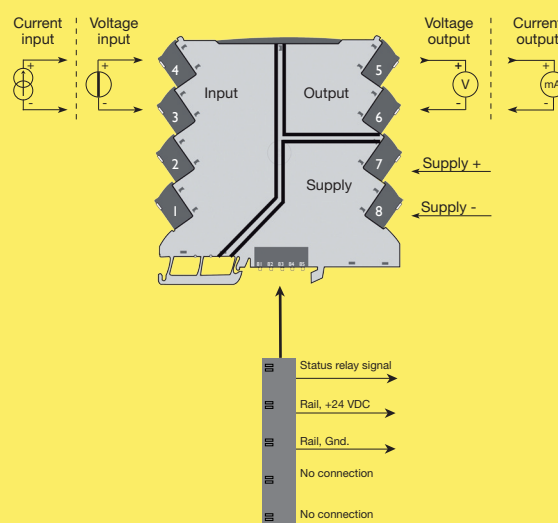

QUALITY SYSTEM AND ENVIRONMENTAL MANAGEMENT SYSTEM
DS/EN ISO 9001
DS/EN ISO 14001

Order codes:

3105 = Isolated Converter

3405 = Power Connector Unit (for power rail)

9400 = Power Rail

9404 = Module Stop

Electrical specifications:

Specifications range:

0°C to +70°C

Common specifications:

Supply voltage, DC	16.8...31.2 VDC
Internal consumption.....	0.4 W (typ.)
	0.65 W (max.)
Power consumption (max.).....	0.8 W
Isolation voltage, test	2.5 kVAC
Working isolation voltage	300 VAC
Accuracy	< ±0.2% of span
Basic accuracy, mA.....	< ±32 µA
Temperature coefficient.....	< ±0.015% of span / °C
Signal / noise ratio.....	> 60 dB (0...100 kHz)
Response time	
(0...90%, 100...10%)	< 7 ms
Calibration temperature.....	20...28°C
EMC immunity influence	< ±1% of span
Wire size (max.)	0.13 x 2.5 mm ²
	stranded wire
Screw terminal torque	0.5 Nm
Relative humidity	< 95% RH (non cond.)
Dimensions (H x W x D).....	113 x 6.1 x 115 mm
DIN rail type.....	EN 60715
Protection degree.....	IP20
Weight	70 g

Voltage input:

Measurement range	0...10.25 mA
Functional range.....	0...11.5 V / 0...0.75 V
Programmable measurement ranges	0...5/1...5/0...10/2...10 V
Input resistance.....	≥500 kΩ

Current output:

Signal range (span).....	0...20.5 mA
Programmable signal ranges.....	0...20 and 4...20 mA
Load (max.).....	23 mA / 600 Ω
Load stability	≤ 0.01% of span / 100 Ω
Current limit.....	≤ 28 mA

Voltage output:

Signal range	0...10 V
Programmable signal ranges.....	0...10/2...10/0...5/1...5 V
Load (min.).....	>10 kΩ













Approvals:

Det Norske Veritas, Ships & Offshore.	Stand. f. Cert No. 2.4
Germanischer Lloyd	V1-7-2
EMC 2004/108/EC	EN 61326-1
LVD 2006/95/EC	EN 61010-1
UL, Standard for Safety.....	UL 61010-1
Safe Isolation.....	EN 61140

Current input:

Measurement range	0...20.5 mA
Functional range.....	0...23 mA
Programmable measurement ranges	0...20 and 4...20 mA
Input voltage drop	<3 VDC


DIP-switch configuration

Input Current 0...20 mA 	Output Current 0...20 mA 
Input Current 4...20 mA 	Output Current 4...20 mA 
Input Voltage 0...10 V 	Output Voltage 0...10 V 
Input Voltage 2...10 V 	Output Voltage 2...10 V 
Input Voltage 0...5 V 	Output Voltage 0...5 V 
Input Voltage 1...5 V 	Output Voltage 1...5 V 

Installation on DIN rail



Marking

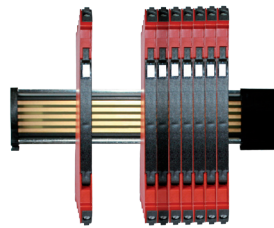

The 3100 series can be installed on a DIN rail supported, if necessary, by a module stop (PR part number 9404).

The front cover of the 3100 series has been designed with an area for affixation of a click-on marker. The area assigned to the marker measures 5 x 7.5 mm. Markers from Weidmüller's MultiCard System, type MF 5/7.5, are suitable (PR part number MF5/7.5).