

## HART temperature converter

### 3113

- HART® 7 revision protocol enables extended programming
- Slimline housing of 6 mm
- Excellent EMC performance
- Pre-calibrated temperature ranges selectable via DIP-switches



#### Application

- The 3113 temperature converter measures a standard Pt100, TC J and K temperature sensor, and provides an isolated active analog current and HART® signal output.
- High 3 port isolation provides surge suppression and protects the control system from transients and noise.
- The 3113 can be mounted in the safe area or in Zone 2 / Division 2 areas.
- Approved for marine applications.


#### Technical characteristics

- Flexibly powered by 24 VDC (±30%) via power rail or connectors.
- A 60 ms fast response time with simultaneous sensor error detection when selected.
- Selectable internal/external CJC.
- Excellent conversion accuracy in all available ranges, better than 0.05% of span.
- Meeting the NAMUR NE21 recommendations, the 3113 provides top measurement performance in harsh EMC environments.
- The device meets the NAMUR NE43 standard defining out of range and sensor error output values.
- A visible green LED indicates operational status of the unit and the input sensor.
- All terminals are protected against overvoltage and polarity error.
- High galvanic isolation of 2.5 kVAC.
- Excellent signal/noise ratio of > 60 dB.


#### Mounting / installation / programming

- Selectable HART® mode with HART® 7 revision protocol enables extended device programming.
- Selectable DIP-mode for easy configuration of more than 1000 factory calibrated measurement ranges with HART® read only feature.
- The narrow 6 mm housing allows up to 165 units to be mounted per meter of DIN rail, without any air gap between units.
- Wide ambient temperature range of -25...+70°C.

#### Connections

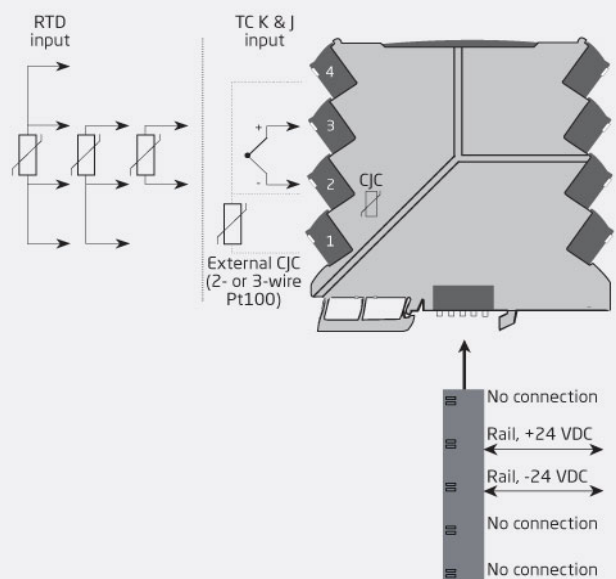

Safe Area or  
Zone 2 & Cl. 1, Div. 2, gr. A-D

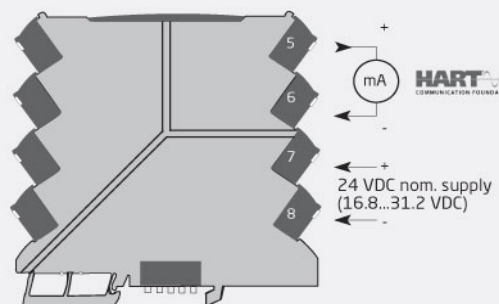

Order:

Type
3113

## Environmental Conditions

Specifications range.....	-25°C to +70°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & measurement / overvoltage cat. II

## Mechanical specifications

Dimensions (HxWxD).....	113 x 6.1 x 115 mm
Weight approx.....	70 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13 x 2.5 mm <sup>2</sup> / AWG 26...12 stranded wire
Screw terminal torque.....	0.5 Nm
Vibration.....	IEC 60068-2-6 : 2007
Vibration: 2...25 Hz.....	±1.6 mm
Vibration: 25...100 Hz.....	±4 g

## Common specifications

Supply voltage.....	16.8...31.2 VDC
Max. power consumption.....	0.7 W
Isolation voltage, test.....	2.5 kVAC
Isolation voltage, working.....	300 VAC (reinforced) / 250 VAC (Zone 2, Div. 2)
Signal / noise ratio.....	> 60 dB
Signal dynamics, input.....	23 bit
Signal dynamics, output.....	18 bit
Response time, HART® mode, (0...90%, 100...10%).....	60 ms...60 s, programmable
Response time, DIP mode, (0...90%, 100...10%).....	< 60 ms
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE 21, A criterion, burst.....	< ±1% of span
Incorrect DIP-switch setting identification.....	3.5 mA output; LED 0.5 s / 1 Hz

## Input specifications

Temperature range, Pt100.....	-200...+850°C
Accuracy, RTD: the greater of.....	Better than 0.05% of span or 0.1°C
Temperature coefficient, RTD: the greater of.....	0.02°C/°C or ≤ ±0.01%/°C
Sensor current, RTD.....	< 150 µA
Sensor cable resistance, RTD.....	< 50 Ω per wire
Effect of sensor cable resistance (3-/4-wire), RTD.....	< 0.002 Ω / Ω
Sensor error detection, RTD.....	Yes - selectable via DIP-switch
Broken sensor detection.....	> 800 Ω
Shorted sensor detection.....	< 18 Ω
Temperature range, TC J.....	-100...+1200°C
Temperature range, TC K.....	-180...+1372°C
Accuracy, TC: the greater of.....	Better than 0.05% of span or 0.5°C
Temperature coefficient, TC: the greater of.....	0.1°C/°C or ≤ ±0.01%/°C
Sensor cable resistance, TC.....	< 5 kΩ per wire
Cold junction compensation (CJC): Accuracy @ external Pt100 input.....	Better than ±0.15°C

Cold junction compensation (CJC): Accuracy @ internal	
CJC.....	Better than ±2.5°C
Open Thermocouple detection.....	Yes - selectable via DIP-switch
Internal CJC error detection.....	Yes
External CJC error detection.....	Yes - selectable via DIP-switch

## Output specifications

Programmable current ranges.....	4...20 and 20...4 mA
Range limits.....	3.8...20.5 mA NAMUR NE43
Sensor error indication.....	3.5 mA or 23 mA / acc. to NAMUR NE43 or OFF
Load (@ current output).....	≤ 600 Ω (23 mA)
Open output.....	< 20 V
Updating time.....	10 ms
Load stability, current output.....	≤ 0.01% of span / 100 Ω
HART® protocol revisions.....	HART® 7

## Approvals

EMC.....	EN 61326-1
LVD.....	EN 61010-1
ATEX.....	KEMA 10ATEX0147 X
IECEX.....	KEM 10.0068X
FM.....	3041043-C
DNV Marine.....	Stand. f. Certific. No. 2.4
GL.....	V1-7-2
GOST R.....	Yes
UL.....	UL 61010-1

Your supplier:



**JSP Industrial Controls**  
[www.jsp.cz](http://www.jsp.cz)

JSP, s.r.o.  
Raisova 547  
506 01 Jičín  
Czech Republic

phone.: +420 493 760 811  
fax: +420 493 760 820  
e-mail: [jsp@jsp.cz](mailto:jsp@jsp.cz)